Eurolift ASCENSEURS

HYBRID

HYBRID, proven mechanics at the best price

EXPORT ONLY

450 to 1,000 kg | 1 to 1.6 m/s | MR or MRL | Stock ready to ship



Simple, robust mechanics combined with QI Touch electronics: the best-value Sodimas lift for volume projects, with or without a machine room.

HYBRID, proven mechanics at the best price

HYBRID is designed in France by Sodimas for concrete shafts, in residential, commercial or industrial buildings. EUROLIFT reserves it for export: depending on the configuration it is available from stock and leaves quickly for your site, making it the ideal solution for projects with several lifts.

Key strengths

Value for money

Proven mechanics without unnecessary complexity: the lowest cost per lift in the Sodimas range.

Ideal for volume

One standard configuration repeated across a whole project: grouped orders, consistent installation and maintenance.

Stock ready to ship

Depending on the configuration, lifts are available from stock and shipped quickly worldwide.

With or without machine room

Machine in a machine room or at the top of the shaft, gearless from 1 to 1.6 m/s.

QI Touch technology


QI Touch controller, which can be moved to the landing in brushed stainless steel or RAL 7032, fast diagnostics and customisation.

Made in France

Designed in France by Sodimas, with every component carefully selected.





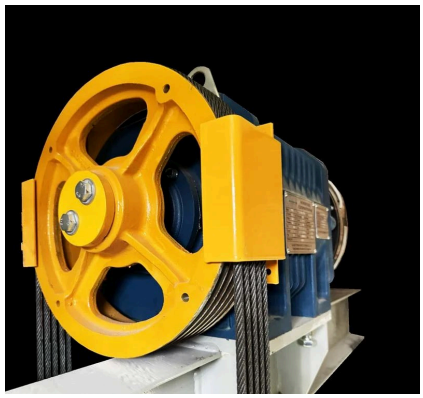

HYBRID

Specifications

Machinery	Machine room (MR) or machine at the top of the shaft (MRL)
Machine	Gearless, 1 to 1.6 m/s maximum
Load	450 and 630 kg; 800 and 1,000 kg as options
Maximum travel	80 m
Roping	2:1
Power supply	Three phase 380/400 V, 50/60 Hz + neutral
Speed governor	High position, 24 Vdc remote control
Doors	Automatic SD20, at landing or in shaft, fire-rated or not, aluminium sill
Operating panels	Surface mounted; 220 × 1060 × 35 mm car half column, 4.3-inch colour display; Blackpad landing boxes
Standard car	Brushed stainless or laminate panels, white epoxy ceiling, LED spotlights, stainless handrail, mirror, PVC floor
Selection	Magnetic tape fixed on guide
Access	Single or opposite
Buffer	Hydraulic above 1 m/s

Sodimas manufacturer data. Photos non-binding. For any other load, speed or dimension, please contact us.

Standard dimensions

	450 kg	630 kg	800 kg (option)	1000 kg (option)
Persons	6	8	10	13
Shaft (W × D)	1500 × 1500	1600 × 1700	1900 × 1700	2100 × 1800
Car (W × D)	1000 × 1200	1100 × 1400	1350 × 1400	1400 × 1600
Car height	2200	2200	2200	2200
Door clear opening	700 / 800 / 900	700 / 800 / 900	700 / 800 / 900	700 / 800 / 900
Min. headroom, MRL 1 m/s / 1.6 m/s	3400 / 3600	3400 / 3600	3500 / 3700	3500 / 3700
Min. headroom, MR 1 m/s / 1.6 m/s	3250 / 3450	3250 / 3450	3250 / 3450	3250 / 3450
Min. pit, 1 m/s / 1.6 m/s	1000 / 1050	1000 / 1050	1000 / 1050	1000 / 1050


Dimensions in mm, door clear height 2,000 mm.

Why export only?


HYBRID serves international markets where volume and lead time come first: EUROLIFT offers it outside France, with stock available depending on configuration. In France, we offer Médium 2.5 and ALPHA Motion.

HYBRID

In pictures

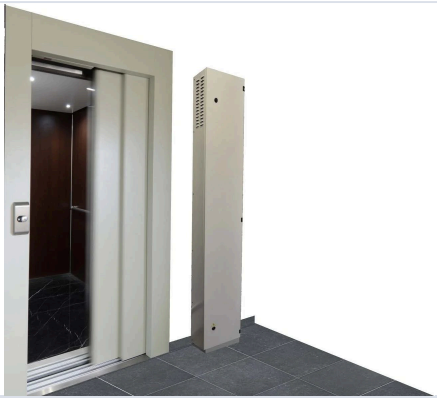

QI Touch controller movable to the landing

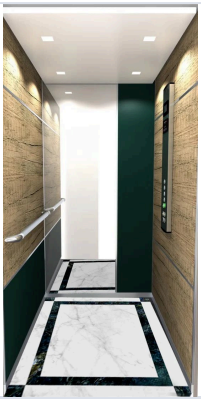

Optional car

Which buildings

- Projects with several lifts
- Apartment buildings
- Offices and shops
- Industrial buildings
- Hotels

Contact

France, French-speaking countries and Europe

WhatsApp +33 7 71 59 46 00

English- and Arabic-speaking countries · Dubai

WhatsApp +971 54 386 1511

contact@euro-lift.fr · **euro-lift.fr**